

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED Multi Watt Multi CCT LOC-ELFL Flood Light With Photocell



CONSTRUCTION:

Aluminum housing with polyester powder-coated finish.

OPTICAL SYSTEM:

Samsung LED chips. High quality tempered glass optics. 7H*7V beam type.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input.

-45°C to 45°C, -49°F to 113°F

INSTALLATION & MOUNTING:

Bracket mounting.

DIMMING:

0-10V dimming.

FEATURES

- Default Wattage: 150W
- IP66 rated
- IK08 rated
- Easy installation and maintenance
- No Mercury or UV
- Photocell included
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships



DLC Product ID:

- LOC-ELFL-MW(80/100/150)50KD-PC – S-XEB207




Photocell

LOC-ELFL-MW(80/100/150)50KD-PC

WATTAGE SELECTABLE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
80W	5000K	11,200LM	140lm/W	120-277V	70	0.95	15%	200W – 300W HID
100W	5000K	14,000LM	140lm/W	120-277V	70	0.95	15%	200W – 300W HID
150W	5000K	21,000LM	140lm/W	120-277V	70	0.95	15%	200W – 300W HID

MEASUREMENTS

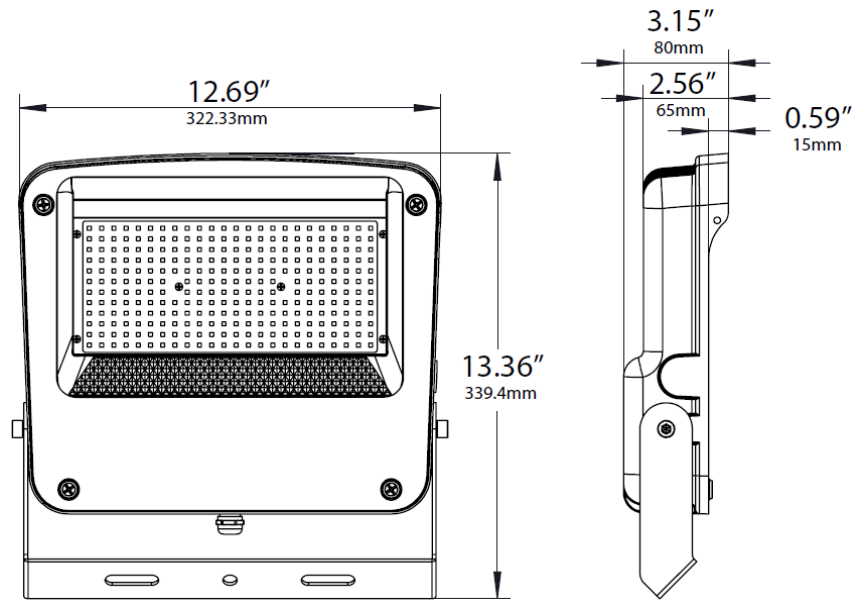

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-ELFL-MW(80/100/150)50KD-PC	1	7.05 lbs	00810050942720