



DR65A3000

Ventilating Dehumidification System

SPECIFICATION DATA

DR65 Capacities and Performance

Part Number:	DR65A3000
Blower:	160 CFM @ 0.0 in. WG 100 CFM @ 0.6 in. WG
Supply Voltage:	120 VAC; 60 Hz.
Amps:	5.2 A
Power transformer to R/C terminals:	24 VAC, 0.85A
Energy performance:	2.22 liters (4.7 pints) per kilowatt hour (KWH) Energy
Refrigerant:	R-410A
Operating Temp Range (outside cabinet):	34 – 135 °F (1.1 – 57.2 °C)
Capacity:	34 pints/day (60 °F [15.6 °C], 60 %RH) 47 pints/day (70 °F [21.1 °C], 60 %RH) 65 pints/day (80 °F [26.7 °C], 60 %RH)
Coverage:	Up to 1800 sq. ft.
Duct Connections:	8 in. Round Inlet 8 in. Round Outlet (ABS Plastic)
Filter Efficiency:	Standard MERV-11
Drain Connection:	3/4 in. threaded female NPT
Dimensions (See Fig. 1):	
Width:	12-5/8 in.
Height:	11-3/4 in.
Length:	21-9/16 in. (without collars)
Collar Length:	3-1/8 in. (each)
Weight:	60 lbs (27 Kg)
Shipping Specs:	
Width:	17 in.
Height:	16.7 in.
Length:	32.9 in.
Weight:	68 lbs (31 Kg)
Optional Parts:	
Replacement Filter	50049537-005
Motorized Ventilation Damper	EARD6
Bypass Damper	CPRD8/U
ETL Listed per UL 60335-1, 60335-2-40, CSA C22.2 No. 60335-1 and 60335-2-40	
For more information visit our website at resideo.com .	

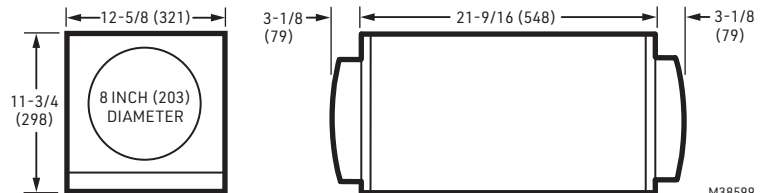


Fig. 1. Dimensions in in. (mm).

Resideo Whole-House Dehumidifiers are designed to help maintain proper humidity levels in the home. Lower humidity levels feel more comfortable, and helps safeguard against problems from excess moisture in the home such as mold, mildew, warped wood, peeling of paint, or musty odors.

Dehumidification

The Resideo DR65A3000 dehumidifier utilizes refrigeration and internal air circulation to cool the incoming air stream below its dew point. Water condenses and drains off the coil, sending drier air back into the house.

- Can remove up to 65 pints/day of moisture.
- Integrated set and forget humidistat
- Side ducted exhaust
- Reduced noise during operation
- MERV 11 air filtration

Ventilation

The Resideo DR65A3000 has a separate control for ventilation, so the powerful onboard blower can be used to efficiently bring fresh air into the house even when dehumidification is not needed.

Simplified Wiring


The Resideo DR65A3000 has an onboard dehumidistat that allows the unit to run without any additional wiring. In addition, Resideo dehumidifiers can be controlled by a variety of 24-volt remote wired and wireless controls.

The DR65A3000 allows the use of a 24V normally closed float switch or water sensor to simplify installation in a drain pan. This will allow the external float switch to kill power to the compressor in the event of water blockage.



A

Dedicated Return to Dedicated Supply

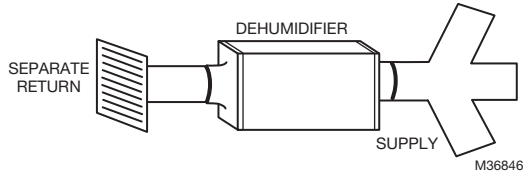


Ideal when...

- DR65A3000 will not be ducted to a forced air HVAC system.

B

Main Return to Main Return

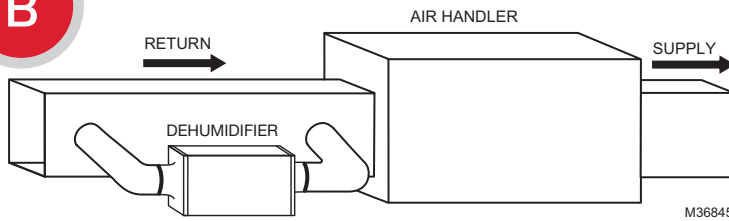

Ideal when...

- Running DR65A3000 with A/C operation.
- System fan must run with dehumidifier.
- Minimizing discharge air temperature (DAT) increase is preferred.
- Access to a dedicated central return for DR65A3000 is not available.



1. Never operate a unit with a damaged power cord. If the power cord is damaged it must be replaced by the manufacturer, its service agent, or similarly qualified person in order to avoid a hazard.
2. The appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.