



Energetic Lighting's LED Bed Light emulates the traditional bi-directional fluorescent fixtures used throughout hospitals and the general medical/nursing industry. Two diffuser panels direct light down, up, or in both directions; 40W (4,600 lumens) downlight, 20W (2,300 lumens) up-light, or 60W (6,905 lumens) altogether. A convenient switchable indicator nightlight is provided next to the pull chain switches, which can be extended to customize the chain length and reach. A 50,000 lifehour rating backed with a 5 year warranty will ensure that this fixture will continue to run for many years of dependable service.

#### **Features**

- Selectable Bi-directional up/down lights
- Nightlight indicator light adjacent to pull switch
- No UV or IR radiation
- Minimalistic and efficient design
- DLC5.1 Standard
- Suitable for Damp Location use
- Easy and secure installation


### **Applications**

- Patient bed overhead lighting
- Overhead task lighting
- Bi-directional area lighting
- General lighting

#### **Specification**

Order Number	30150
Model Number	E2BL2040D-840
Beam Angle	Independent up/down°
<b>Optical Distribution</b>	
Lumen Output	6905 (4600 down+2300 up) LM
Luminous Efficacy	119 LM/W
Input Power	60W
Input Voltage	120 Vac
Power Factor	0.99
THD	0.1
Color Temp (CCT)	4000 K
Color Rend (CRI)	>80
Lifetime Rating	50000 hours
Warranty	5 Years
Dimmability	No
<b>Operating Temp</b>	-4 to 104 (°F)
Environment	Damp Location
DLC	DLC 5.1 Standard
Energy Star	
Safety Cert	UL
Weight	6.8 LBS
Dimensions	48.6"x4.6"x4.6"

## **Photometric Data**

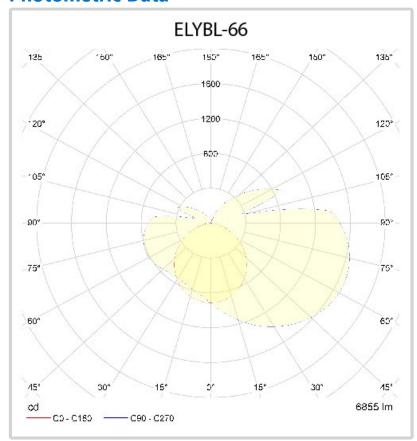

# **Dimensions and Packaging Info**

Model Number	E2BL2040D-840
Item UPC	TBD
Case UPC	TBD
Master Carton UPC	TBD
Item(s) per pack	1 fixture per package
packs per case	2 packs per case
Case per Master	
Item weight	10 LBS
Case weight	22 LBS
Master Weight	
Item pack dimensions	49.5"(W) x 6.5"(L) x 5.5"(H)
Case dimensions	50"(W) x 13"(L) x 6"(H)
Master dimensions	

Page: 2 of 2