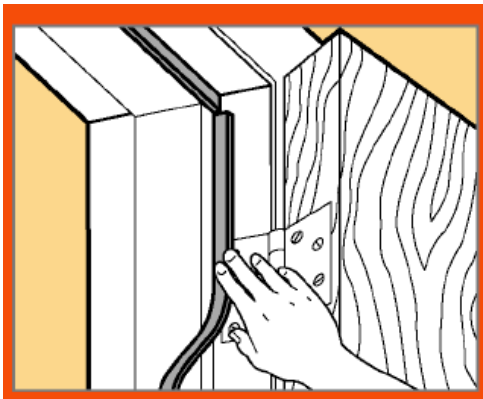

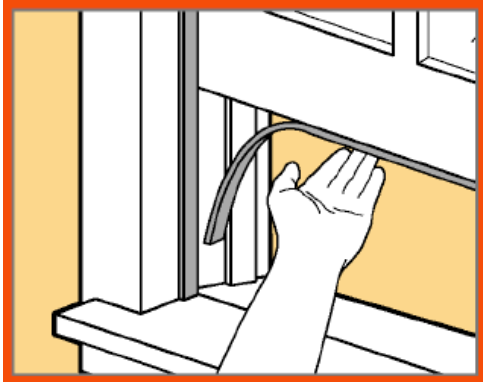

Low Density Foam Tape Weatherstrip

Easy to Use:

1. Apply to clean dry surface above 40°F (5°C). Peel off paper backing, press in place and trim to length.

Door: Top/Latch side – Apply to door stop so closing door compresses tape.

Hinge side – Apply to door jamb so tape is compressed between jamb and edge of closing door.

Window: Place tape on bottom of sash rail to form seal when window is closed.