



Bi-Max Showerhead

1.0 / 1.5 GPM
(3.8 / 5.7 LPM)

- Two flow rate options
- Pressure compensated water flow



Certified by
CSA International

WATER 



NIAGARA
CONSERVATION®



N2610CH* Bi-Max Showerhead


1.0 / 1.5 GPM
(3.8 / 5.7 LPM)

Conservation with a *Twist!* Bi-Max is a unique, two-flow rate showerhead, allowing you to match your flow rate to your task and save more while you shower.

- Two pressure compensated flow rate options: 1.0 and 1.5 gallon per minute (3.8 and 5.7 litre per minute)
- Niagara's patented non-removable pressure compensator provides a constant output of water regardless of pressure
- Easy grip turn-dial for selecting flow rate
- Even, needle spray with a large spray diameter
- Compact, modern design
- Corrosion resistant high-impact ABS thermoplastic body
- Large POM swivel adjustment, virtually lead free
- Overall dimensions: 2.125" diameter x 3.75" (54 x 97mm)
- 10-year warranty

Certifications: Meets or exceeds: ASME A112.18.1 / CSA B125.1
WaterSense certified - Max. Flow Rate: 1.5 GPM (5.7 LPM)
Min. Flow Rate at 45PSI: 1.13 GPM (4.3 LPM)

Case Qty: 100

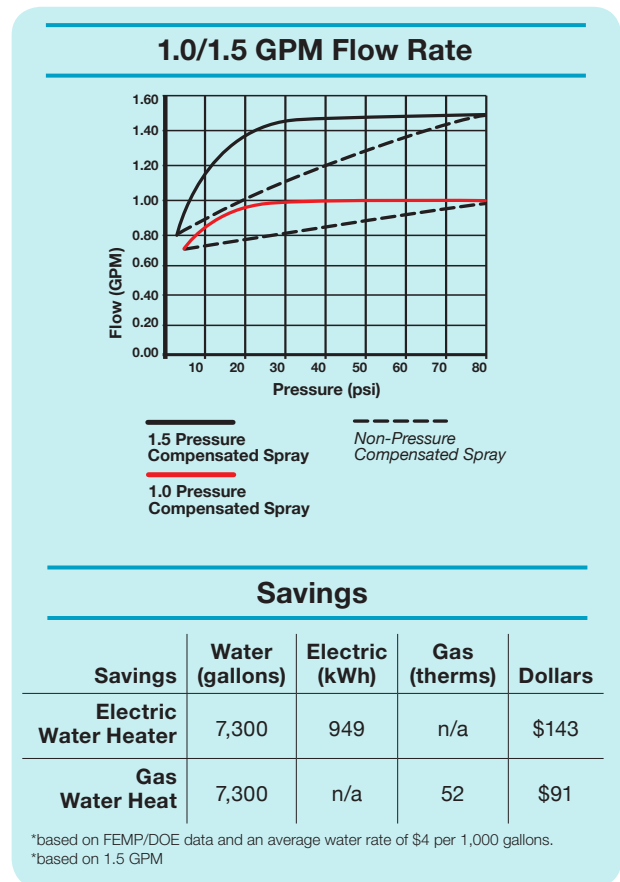

*Also Available in:



White / Chrome
Item# N2610



Corporate HQ
4200 Diplomacy Road
Fort Worth, TX 76155 USA
Toll Free: 800.831.8383
Phone: 973.829.0800 Fax: 817.390.0801

For more information please visit:
www.NiagaraConservation.com