

PCA® Spray Faucet Attachment - 1.0 gpm max Pressure Compensating Regular Size




flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Also compatible with regular and vandal proof M22 and M24 metric housing.
- ▶ Available housing finishes: unplated, chrome and PVD.
- ▶ Laser marked housings: Custom logo and/or statutory marking.

Certifications

ANSI/NSF®-61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements
WaterSense

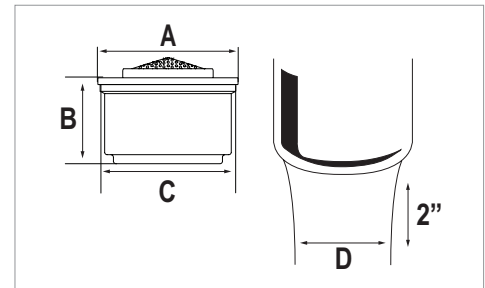

Options Available


Part #	Designation
A5.9046.1	Insert only
40.7058.613	Regular male 15/16"-27
40.7058.623	Regular female 55/64"-27
40.7058.673	Regular dual thread 15/16"-27 / 55/64"-27
40.7058.723	Vandal proof regular male 15/16"-27
40.7058.733	Vandal proof regular female 55/64"-27
40.7058.603	Vandal proof dual thread
BX.399R.1	Regular vandal key

*Other combinations also available
- WSA applies to insert only

Color Code

Dome	Flow Regulator	Basket
Natural	Blue	Dark Gray

Flow Rate Curve

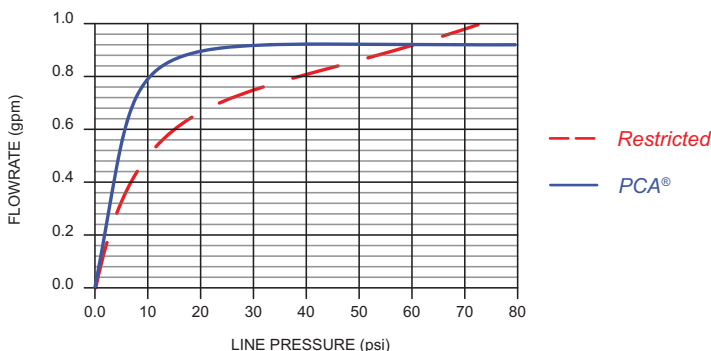

Dimensions

No	mm	In
A	20.85	.821
B	13.00	.512
C	19.95	.785
D	≈ 25	≈ 1

Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM
Wetted surface area: 2963 mm²

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

