

LEDone


Projects:

Comments:

Stadium Flood Light 500W Spec

SPECIFICATIONS:

WATTAGE:	500W
DLC WATTAGE:	510W
MODEL #:	LOD-SFL-500W
DLC #:	GL-FL-500W
MANUFACTURER:	Shenzhen Mecree Photoelectric Technology Co., Ltd
CERTIFICATION:	CE/RoHS/FCC/ETL
INPUT VOLTAGE:	100-277VAC
POWER FACTOR:	0.9
FREQUENCY:	50-60Hz
LUMENS:	60242.11Lm
LUMENS EFFICACY:	114.2 lm/w
KELVIN (CCT):	3000/4000/5000
THD:	<9%
CRI:	80
IP RATING:	IP67
BEAM ANGLE (DEGREE):	10/24/38/60/90 °
MATERIALS:	AL+GLASS
DRIVER:	MeanWell
LED LIGHT SOURCE	Cree
LIFE SPAN (HOURS):	>50000H
DIMMING COMPATIBLE:	0-10V
LENGTH OF WARRANTY (YEARS):	5Years
SIZE(MM):	738*457*104 mm
WORKING ENVIRONMENT:	-400°C +800°C
POWER EFFICIENCY:	>90%
NET WEIGHT:	18 Kg
PERCENTAGE OF WATTAGE SAVED:	45 - 50%

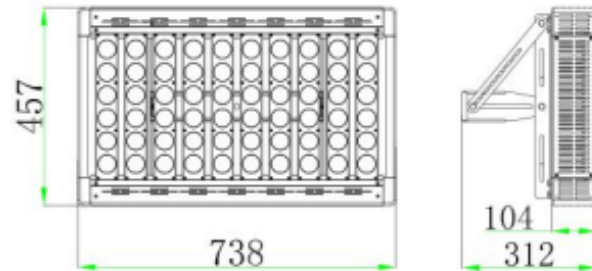

Features:

System Light Efficacy 100 LPW. Flexible, Modular Design. Multiple Choice of Optical Lenses. Easy Installation & Maintenance. ETL, CE, RoHS, CB, and WEEE certified.

Applications:

General flood lighting, corridor lighting, security lighting, and roof top lighting. Can also be used as a high bay.

