



Specification

Order Number	30150
Model Number	E2BL2040D-840
Beam Angle	Independent up/down°
Optical Distribution	
Lumen Output	6905 (4600 down+2300 up) LM
Luminous Efficacy	119 LM/W
Input Power	60W
Input Voltage	120 Vac
Power Factor	0.99
THD	0.1
Color Temp (CCT)	4000K - 5000K
Color Rend (CRI)	>80
Lifetime Rating	50000 hours
Warranty	5 Years
Dimmability	No
Operating Temp	-4 to 104 (Â°F)
Environment	Damp Location
DLC	DLC 5.1 Standard
Energy Star	
Safety Cert	UL
Weight	6.8 LBS
Dimensions	48.6"x4.6"x4.6"


Features

- Selectable Bi-directional up/down lights
- Nightlight indicator light adjacent to pull switch
- No UV or IR radiation
- Minimalistic and efficient design
- DLC5.1 Standard
- Suitable for Damp Location use
- Easy and secure installation

Applications

- Patient bed overhead lighting
- Overhead task lighting
- Bi-directional area lighting
- General lighting

Photometric Data

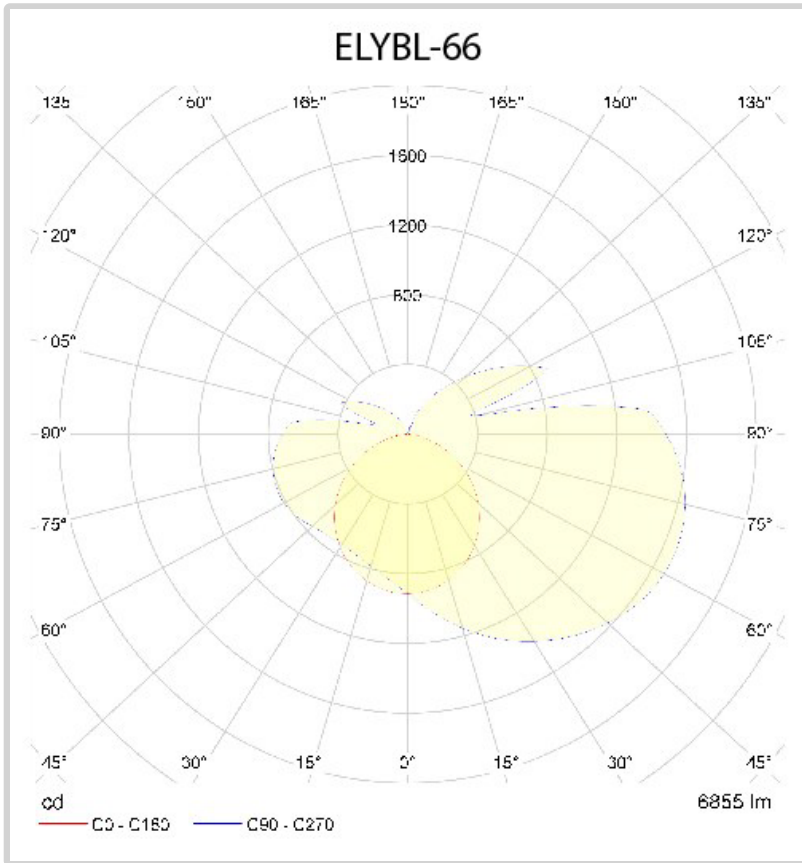

Dimensions and Packaging Info

Model Number	E2BL2040D-840
Item UPC	TBD
Case UPC	TBD
Master Carton UPC	TBD
Item(s) per pack	1 fixture per package
packs per case	2 packs per case
Case per Master	
Item weight	10 LBS
Case weight	22 LBS
Master Weight	
Item pack dimensions	49.5"(W) x 6.5"(L) x 5.5"(H)
Case dimensions	50"(W) x 13"(L) x 6"(H)
Master dimensions	